

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number
WO 2004/035919 A1

- (51) International Patent Classification⁷: **D21F 9/00**
- (21) International Application Number:
PCT/IT2002/000657
- (22) International Filing Date: 15 October 2002 (15.10.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): **A. CELLI NONWOVENS S.P.A.** [IT/IT]; Via Romana Ovest, 212, I-55016 Porcari (LU) (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **CELLI, Alessandro** [IT/IT]; Via Micheloni, 20, I-55015 Montecatini (IT).
- (74) Agents: **MANNUCCI, Michele et al.**; Ufficio Tecn. Ing. A. Mannucci S.r.l., via della Scala, 4, I-50123 Firenze (IT).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **DEVICE FOR DRY FORMING A WEB OF FIBERS**

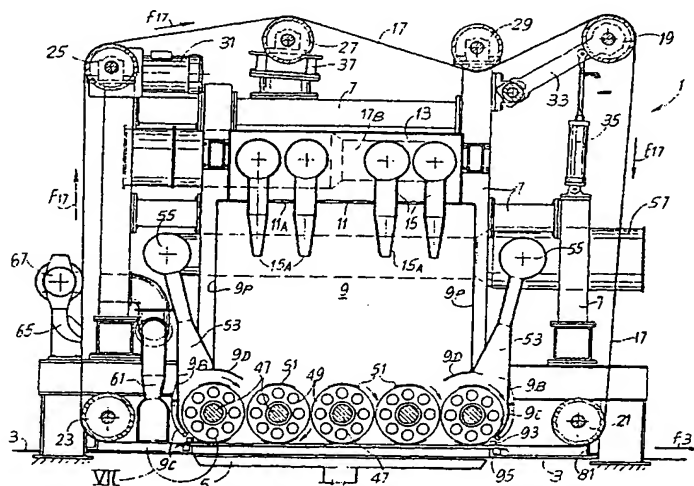

(57) Abstract: What is described is a device for dry forming a web of fibers, comprising: a fiber distribution head (1); a forming wire (3) movable under said head; a suction means (5) located on the opposite side of said forming wire from said head; within said head, a chamber (9) into which a flow of gas, in which said fibers are suspended, is directed, the chamber having a bottom opening (9A) closed by a screen mesh (17) which is essentially parallel to said forming wire (3) and which faces the latter; and agitator members (45) inside said chamber, above said screen mesh (17), for agitating and distributing the fibers. Characteristically, the screen mesh (17) is a continuous mesh, movable along a closed path around said chamber, the portion of said mesh parallel to and facing the forming wire moving along a path which is essentially parallel to said forming wire. Additionally, the agitator members comprise a plurality of rotating shafts (47) which are parallel to each other and orthogonal to the direction of advance (F3) of said forming wire.

- 1 -

DEVICE FOR DRY FORMING A WEB OF FIBERS
DESCRIPTION

Technical Field

The present invention relates to a device for producing a web or sheet
5 of fibrous material by a dry method, in other words without using a water-based fiber stock.

Prior Art

Webbs or sheets of fibrous material, particularly paper, absorbent paper,
or what is known as "tissue paper", are normally produced by means of
10 processes and machines in which a water-based stock of cellulose fibers is distributed on a forming screen to form a thin web. This web is then dried by suction to remove the water and by subsequent passage over a heated roller or other drying device.

In relatively recent times, a new process was introduced for producing
15 paper, particularly very thick absorbent paper, for example for the production of sanitary articles such as diapers for infants or sanitary pads. In this process, a web of fibers supplied by a flow of air is distributed on a forming screen or wire. This is known as the "airlaid" process.

Devices of various types have been designed for carrying out the dry
20 forming process, in order to make the distribution of fibers as uniform as possible, and in order to overcome many of the drawbacks and problems of this new method.

In general, airlaid webs are produced by suspending the fibers in a flow
of air and depositing them on a forming mesh or screen, under which suction
25 is applied to guide the fibers which are supplied from a forming head placed above. The fibers are distributed in the flow of air by various methods.

A first category of devices uses a forming head with a mesh screen
located under it, through which the fibers are drawn by a flow of air. A forming
30 wire runs under the mesh screen which closes the underside of the forming head, and the fibers are deposited on the forming wire to form the web. Above the screen closing the underside of the forming head there are propellers rotating about vertical axes, in other words axes orthogonal to the forming

5 wire and to the screen. The fibers are drawn by a flow of air through the screen closing the head and are deposited on the forming wire. Examples of devices made in this way are described in GB-1499687; GB-1559274; US-A-3581706; US-A-4014635; US-A-4157724; US-A-4276248; US-A-4285647; US-A-4335066; US-A-4351793; US-A-4482308; US-A-4494278; US-A-4627953; US-A-5527171; US-A-5471712; WO-A-9105100; WO-A-9522656; WO-A-9610663; WO-A-9954537; EP-B-616056.

10 A second type of device for distributing the fibers in the flow of air which is sucked through the forming wire makes use of one or more perforated pipes with axes parallel to the forming wire. The fibers drawn by the air emerge from the holes in the pipes and are deposited on the underlying forming wire, which advances in the direction of feeding. EP-A-032772 describes a forming head of this type. A pair of tubes with parallel axes is positioned above the forming wire. The tubes have perforated walls through which the fibers pass out, the fibers being carried by a flow of air inside said tubes. To promote the outflow of the fibers and to prevent their accumulation inside the tubes, rotating shafts, having their axes parallel to the tubes and having radial points, are fitted in the tubes. The points have the additional function of disintegrating any lumps of fibers which form in the flow of air carrying them. Devices based essentially on the same principle are described in US-A-4352649, WO-A-8701403 and EP-B-188454. In these devices, the forming head has no screen closing its underside, and the flow of air and suspended fibers is confined to the interior of the pipes with perforated walls, where the perforated wall has the same function as the screen closing the heads of the first type mentioned above.

25 US-A-6233787 describes a device for dry forming a web of fibers in which a head which receives a flow of air with the suspended fibers is positioned above the forming wire. The head has in its lower part a set of rotating shafts or rollers, with axes parallel to each other and to the forming wire, and extending transversely with respect to the direction of advance of the forming wire. The shafts or rollers have radial points or rods which extend in such a way that they essentially close the lower aperture of the head,

- 3 -

forming a kind of permeable wall which permits the passage of the fibers which are drawn by the flow of air sucked from below the forming head.

EP-A-159618 describes a device for dry forming a web of fibers, comprising a forming head located above the forming screen through which is sucked the flow of air which draws the fibers. The bottom of the forming head is closed by a fixed screen, which is perforated to allow the passage of the fibers. Above the fixed screen there is a plurality of rollers having axes parallel to the forming screen and orthogonal to the direction of advance of the latter. The rollers are equipped with radial points and are supported by a continuous conveyor which moves them in a direction parallel to the direction of advance of the forming screen.

Objects and summary of the invention

The object of the present invention is to provide a new type of device for producing sheets or webs of fiber material by a dry forming process which is particularly efficient and enables high-quality material to be produced.

This and other objects and advantages, which the following text will make clear to those skilled in the art, are essentially achieved with a device for dry forming a web of fibers, comprising: a fiber distribution head; a forming wire movable under said head; a suction means located on the opposite side of said forming wire from said head; within said head, a chamber into which a flow of gas (particularly air), in which said fibers are suspended, is directed, the chamber having a bottom opening closed by a screen mesh which is essentially parallel to said forming wire and which faces the latter; and agitator members inside said chamber, above said screen mesh, for agitating and distributing the fibers. Characteristically, the screen mesh is made to be continuous and movable along a closed path around said chamber, the portion of said mesh parallel to and facing the forming wire moving along a path which is essentially parallel to said forming wire. Additionally, the agitator members comprise a plurality of rotating shafts which are parallel to each other and orthogonal to the direction of advance of the forming wire, said shafts being provided with shaped profiles to agitate the fibers in the chamber.

The chamber is essentially closed off from the external environment,

- 4 -

except at the bottom opening, past which the screen mesh runs. Thus a well-controlled flow of air and suspended fibers is generated, this flow being intercepted by the forming wire on which the web of fibers is formed. This web is subsequently consolidated in various ways, by known methods. The
5 presence of a movable screen mesh and agitator members rotating about axes parallel to each other and to the plane of the screen mesh and consequently to the forming wire makes the device particularly efficient and suitable for forming a uniform web.

In a preferred embodiment of the invention, in order to feed the flow of
10 air and suspended fibers into the chamber of the forming head, a plurality of diffusers is advantageously provided above the agitator members, the diffusers being provided with outlets, facing said agitator members, for the admission of said flow of air and fibers. The admission outlets can be made in a shape which is elongated, for example in a direction parallel to the axes of
15 rotation of the agitator members. The diffusers can be aligned parallel to the axes of rotation of the agitator members. The distance between the inlet apertures, their size and their distance from the screen mesh are parameters which are chosen in such a way that the flows generated by the various aligned apertures intersect each other above the screen mesh. This provides
20 a greater regularity of the thickness of the web formed on the forming wire.

In order to eliminate the lumps which may form in the chamber of the forming head, in an advantageous embodiment of the device suction members are associated with the chamber for sucking in and recycling the lumps. The lumps are then sent to known means which disintegrate them and
25 recover the fibers which are reintroduced into the flow of air fed to the forming head.

In a particularly advantageous embodiment of the present invention, the suction members comprise at least one set of suction inlets adjacent to each other along a direction of alignment which is transverse with respect to
30 the direction of advance of said forming wire. Preferably, two sets of suction inlets are provided, in the proximity of the upstream and downstream ends of the chamber with respect to the direction of advance of the screen mesh.

- 5 -

These are the areas most likely to contain accumulations of lumps, which are thus promptly removed and recycled.

The agitator members can be rotated by a single motor unit. However, in a preferred embodiment of the invention, a plurality of independent motors
5 can be provided, for groups of agitator members for example. Preferably, each agitator member comprises its own independent motor. The motors can be bidirectional, to enable the direction of rotation of the agitator members to be reversed. When an independent motor is provided for each agitator member, the velocity and direction of rotation of each agitator member can be
10 controlled independently of the others.

The shaped profiles of the shafts of the individual agitator members can advantageously have a pointed configuration. They can be formed, for example, in a shape approximating to an isosceles triangle, with the sides converging toward the vertex of the triangle being curved instead of straight
15 and, in particular, concave toward the outside of the triangle. Additionally, the shaped piece preferably lies on a cylindrical surface whose axis coincides with the axis of rotation of the shaft of the corresponding agitator member. The various shaped profiles can be supported on and integral with disks keyed on the shafts of the agitator members. Each disk has one or preferably
20 two profiles.

In order to obtain a particularly regular flow of air and fibers toward the screen mesh, a compartment for the introduction of an auxiliary flow of gas (particularly air) can be provided above the chamber into which the diffusers carrying the fibers suspended in the flow of air open, and holes can be made
25 in a separating partition which divides the compartment from the chamber, to allow said auxiliary flow to pass from the compartment to the chamber. The auxiliary flow of air can be suitably controlled in respect of temperature and/or humidity, to ensure optimal conditions for forming the web. The velocity of the auxiliary flow and consequently the total quantity of air entering the chamber
30 and passing out through the screen mesh can also be controlled, by adjusting the auxiliary flow and also if necessary the flow of air carrying the fibers which enters the chamber through the aforesaid diffusers.

- 6 -

In an advantageous embodiment of the device, the distance of the screen mesh from the agitator members is made adjustable, thus allowing the modification of the web forming conditions and consequently the characteristics of the product. For this purpose, the portion of said screen mesh forming the bottom closure of the chamber is advantageously guided by guide members whose distance from the agitator members is adjustable. These guide members can comprise, for example, an upper frame and a lower frame, essentially parallel to and spaced apart from each other, through which said screen mesh passes. The frames are supported in a position which is adjustable with respect to the agitator members. The frames advantageously have guide members for the screen mesh, and, in order to prevent or at least reduce the suction of air from the outside toward the forming wire, extendable sealing means can advantageously be provided between the guide members and the chamber of the forming head, these sealing means adapting themselves to the position taken up by the screen mesh with respect to the agitator members. Adjustable sealing means can also be provided between the guide members and the forming wire.

Further advantageous characteristics and embodiments of the invention are indicated in the attached claims and in the dependent claims.

20 Brief description of the drawings

The invention will be more clearly understood from the description and the attached drawing, which shows a practical and non-restrictive embodiment of the invention. In the drawing, in which identical numbers indicate identical or corresponding parts,

25 Fig. 1 shows a perspective view of the forming head;

Fig. 2 shows a perspective view of one of the agitator members;

Fig. 3 shows a side view taken through III-III in Fig. 5;

Fig. 4 shows a front view taken through IV-IV in Figs. 3 and 5;

Fig. 5 shows a plan view taken through V-V in Figs. 3 and 4;

30 Fig. 6 shows a section according to a vertical plane indicated by VI-VI in Fig. 4;

Fig. 7 shows an enlargement of the detail VII of Fig. 6;

- 7 -

Fig. 8 shows an enlargement of the detail VIII of Fig. 6; and

Fig. 9 shows a perspective view of the detail of Fig. 8.

Detailed description of the preferred embodiment of the invention

The device comprises, in a general way, a forming head, indicated as a whole by 1, and a forming wire 3, shown in particular in Figs. 6 and 7 and omitted for the sake of simplicity in the other figures. A suction box 5 is positioned under the forming wire 3, in other words on the opposite side of the wire to that on which the forming head 1 is located. As described more fully below, a flow of air is fed into the forming head and draws with it fibers of cellulose or of other suitable material. The flow is sucked by the suction box 5, and the fibers are intercepted by the forming wire 1, thus generating on the screen a web V of fibers (Fig. 7), which is subsequently consolidated in a known way. The forming wire 3 advances in the direction of the arrow f3.

The head 1 has a supporting structure 7 inside which is positioned a chamber 9 into which the flow of air and suspended fibers is fed. The chamber 9 is of essentially parallelepipedal shape, delimited by four vertical walls and a top wall 11. The wall 11 forms a partition which separates the chamber 9 from a compartment 13 located above. Holes 11A are made in the wall 11 to bring the compartment 13 into communication with the chamber 9. An air supply pipe 14 opens into the compartment 13. The air introduced by the pipe 14 has controlled temperature and humidity, and penetrates into the underlying chamber 9 through the holes 11A in the wall or dividing partition 11.

From the wall 11 there extend towards the interior of the chamber 9 diffusers 15 terminating in outlets or nozzles 15A having a tapered shape elongated in a direction orthogonal to the direction of advance f3 of the forming wire 3. The diffusers 15 are positioned in four rows orthogonal to the direction of advance f3 of the forming wire 3. They are connected to two manifolds for the introduction of the flow of air and fibers, indicated by 18A and 18B, which are supplied by known means which are not shown. In practice, each of the two manifolds 18A and 18B supplies two rows of diffusers 15.

- 8 -

The chamber 9 is open at its bottom, and a screen mesh 17 runs past the opening 9A (Fig. 7) and extends along a closed path around said chamber 9. The path is delimited by rollers 19, 21, 23, 25, 27 and 29. The roller 25 is powered by a motor 31 and transmits the motion to the screen mesh 17, which moves continuously in the direction of the arrow f17. In the illustrated example, the portion of mesh which closes the bottom of the chamber 9 and is parallel to the forming wire 3 advances in the opposite direction to the direction of advance of said wire, although it would also be possible to make it advance in the same direction. The roller 19 is supported by a pair of movable oscillating arms 33 acted on by cylinder and piston actuators 35 which keep the screen mesh 17 under tension. The roller 27 is associated with known means 37 which modify the position of the axis of said roller to keep the screen mesh correctly guided.

The lower rollers 21 and 23, between which extends the lower branch of the screen mesh 17 closing the bottom opening of the chamber 9, have movable axes, and their position with respect to the bottom opening of the chamber 9 can be adjusted to modify the position of the screen mesh with respect to the agitator members which are located within the chamber 9 and which are described below.

The structure 7 of the forming head 1 carries a set of supports 41 and 43, which support agitator members indicated as a whole by 45. One of said agitator members is shown in isolation and in a perspective view in Fig. 2. Each agitator member comprises a shaft 47, extending transversely with respect to the direction of advance of the forming wire 3 and of the screen mesh 17, and supported by a pair of supports 41 and 43. Each support 43 is associated with an independent variable-speed bidirectional motor 46, which rotates the corresponding shaft 47.

A plurality of disks 49 is keyed on each shaft 47. Two shaped profiles 51 are fixed on the circular edge of each disk 49. Each shaped piece has a pointed configuration, and consists essentially of three sides arranged in the form of an isosceles triangle whose vertex forms the aforesaid point. The sides converging on the vertex are curved, with the concavity facing the

- 9 -

outside of the triangle. The triangle lies on a theoretical cylindrical surface coaxial with the corresponding shaft 47. The points formed by the two shaped profiles 51 integral with a single disk 49 are orientated in the same direction. In a different embodiment which is not illustrated, each shaped piece is
5 double and symmetrical and has two opposed points, to produce the same effect on the fibers even when the direction of rotation is reversed.

As shown in particular in the section in Fig. 6, the end walls 9P of the chamber 9, in other words those orthogonal to the direction of advance f3 of the forming wire 3, terminate at their bases in a casing 9B which partially
10 encloses the outer two agitator members 45. Two deflectors 9D extend into the chamber 9 above these outer agitator members. The lower part 9B and 9C of the end walls 9P and the deflectors 9D delimit the inlet area of two sets of suction inlets 53. The suction inlets 53 are arranged in two alignments which are transverse with respect to the direction of advance of the forming
15 wire 3, adjacently to the outer two agitator members 45. In the illustrated example, six suction inlets 53 are provided for each set. The six suction inlets of each set are connected to a corresponding manifold 55 and the two manifolds 55 are connected to a suction pipe 57. A recycling air flow is sucked through this pipe and draws with it the lumps of fibers which have not passed
20 through the screen mesh 17. The recycling air flow is sent to means of breaking the lumps and recovering the fibers, these means being known and not illustrated.

Between the return roller 23 and the corresponding end wall 9P, 9B, 9C of the chamber 9 there is positioned a suction member 61 which extends
25 across the whole width of the screen mesh 17 and which is located adjacent to the inner surface of the screen mesh, in other words the surface facing the interior of the closed path of said mesh. The suction member 61 has the function of removing from the mesh any residues of fibers still adhering to it. It is connected to a suction pipe 63.

30 A suction member 65 connected to a suction pipe 67 is located outside the path of the screen mesh 17, between the return roller 23 and the return roller 25. The suction member 65 extends across the width of the screen

- 10 -

mesh 17 and sucks away any fibers or residues adhering to said mesh.

The return roller 23 is associated with a doctor blade 71 which detaches any detritus or residues of fibers which may have been transferred from the screen mesh to the roller and remain adhering to said roller.

5 As shown in particular in Figs. 3, 6 and 9, the return rollers 21 and 23 are supported by two pairs of supports 73 and 75, fixed to two pairs of plates 77 and 79. Each pair of plates 77 and 79 is integral with a cross-member 81 which extends parallel to the direction of advance f3 of the forming wire 3. Each of the plates 77 and 79 is fixed to the fixed structure 7 by clamping
10 screws 83 (Fig. 9) which are inserted into slotted holes 85 in said plates and are engaged in threaded holes (not visible) formed in a plate 7A forming part of the supporting structure 7. When the screws 83 are slackened, each of the plates 77 can be made to slide vertically, by means of an adjusting screw 87 engaged in a nut 89 integral with the corresponding plate 77 and supported
15 by a block 91 integral with the structure 7. Thus it is possible to adjust the position of the pair of rollers 21 and 23 and consequently the position of the screen mesh 17 with respect to the structure 7 and therefore with respect to the agitator members 45.

The portion of the screen mesh 17 extending under the opening 9A of
20 the chamber 9 is guided between two frames 93 and 95, these being the upper and lower frames respectively (see, in particular, Fig. 7). The two frames 93 and 95 are integral with the cross-members 81 and their vertical position is therefore adjustable. Each frame is formed from four square metal sections arranged in a rectangle, the sections forming the upper frame 93
25 having a smaller cross-section than that of the sections forming the lower frame 95. On the lower surface of the upper frame 93 there are fitted guide sections 97 which have a lower flange 97A for the actual guiding, parallel to the screen mesh 17, and a flange 97B orthogonal to the screen mesh 17, which extends parallel to a terminal wall 9E which delimits the opening 9A of
30 the chamber 9. The two sections 97B and 9E which are parallel to each other form a kind of wall which can be telescopically extended and contracted when the cross-members 81, and consequently the two frames 93 and 95, are

- 11 -

lowered and raised. This extendable and contractible wall forms a sealing system which prevents or at least drastically reduces the suction of air from the outside toward the suction box 5 located under the forming wire 3.

A guide section 99 with a horizontal flange 99A parallel to the flange 97A, and a vertical flange 99B, is fitted on the upper surface of the lower frame 95. Four lengths of metal section 99 welded along the four sides of the frame 95 form, with their respective flanges 99B, an outlet essentially corresponding to the opening of the chamber 9 located above. A box 101 is fitted around the outlet formed by the sections 99, and its position with respect to the frame 95 and to the sections 99 can be adjusted by means of a system of tightening screws and slots. The box 101 is open at its top toward the screen mesh 17 and at its bottom toward the forming wire 3, and delimits the space through which the flow of air and fibers leaving the screen mesh 17 reaches the forming wire 3 as a result of the suction applied by the suction box 5. Since the position of the box 101 can be adjusted with respect to the frame 95, the lower edge of said box can be positioned as closely as possible to the forming wire 3, thus reducing the passage cross section of the air sucked in from the outside through the forming wire 3.

With this particular arrangement, the distance of the screen mesh 17 from the agitator members 45 can be adjusted while the space under the opening 9A of the chamber 9, between said chamber and the forming wire, is kept essentially sealed, regardless of the position of the screen mesh.

The operation of the device described up to this point is as follows. The forming wire 3 is made to move, by means of powered and return rollers, which are not shown and which are of known types, in such a way that it passes under the forming head 1 at an essentially uniform velocity. The pressure in the suction box 5 is reduced. A flow of air with suspended fibers is fed into the chamber 9 of the forming head 1 through the manifolds 18A and 18B and the diffusers 15. In addition to the main flow from the diffusers 15, in which the fibers are suspended, a secondary air flow is blown into the chamber 9 through the pipe 14 and the compartment 13. The agitator members 45 are rotated, normally all at the same velocity and in a direction of

- 12 -

rotation such that the points of the shaped profiles 51 have a tangential velocity essentially matching the direction of advance of the screen mesh 17 and the forming wire 3. Thus the fibers located nearest to the screen mesh are pushed by the concave portions of the profiles 51 towards the sides of the chamber and are distributed uniformly over the surface of the mesh facing them through the opening 9A of the chamber 9. Additionally, the movement of the profiles 51 in the upper part of their path creates turbulence in the flow of air and fibers, thus providing a better and more uniform distribution of the fibers in the space of the chamber 9, and also preventing the formation of lumps.

By suitably programming the control unit of the forming head, the velocity of rotation of the individual agitator members 45 can be modified, and the direction of rotation of one or more of them can also be reversed if necessary.

The suction inlets 53 are kept at slightly reduced pressure and suck in the lumps of fibers which reach the front and rear ends of the chamber 9 (with respect to the direction of advance of the forming wire 3) and enable the fibers forming these lumps to be recovered and recycled after dissolution of said lumps.

It should be understood that the drawing shows only one possible embodiment of the invention, which can be varied in its forms and arrangements without departure from the scope of the essential concept of the invention. The presence of reference numbers in the attached claims has the sole purpose of facilitating the reading of the claims with reference to the preceding description and the attached drawings, and does not in any way limit the protective scope of the claims.

- 13 -

CLAIMS

1. Device for dry forming a web of fibers, comprising: a fiber distribution head (1); a forming wire (3) movable under said head; a suction means (5) located on the opposite side of said forming wire from said head; within said head, a chamber (9) into which a flow of gas, in which said fibers are suspended, is directed, the chamber having a bottom opening (9A) closed by a screen mesh (17) which is essentially parallel to said forming wire (3) and which faces the latter; and agitator members (45) inside said chamber, above said screen mesh (17), for agitating and distributing the fibers; characterized in that:
- said screen mesh (17) is made to be continuous and movable along a closed path around said chamber, the portion of said mesh parallel to and facing the forming wire moving along a path which is essentially parallel to said forming wire; and
 - said agitator members comprise a plurality of rotating shafts (47) which are parallel to each other and orthogonal to the direction of advance (f3) of said forming wire, said shafts being provided with shaped profiles (51) to agitate the fibers in said chamber.
2. Device according to Claim 1, characterized in that a plurality of diffusers (15) opens into said chamber (9), these diffusers being positioned above the agitator members (45) and being provided with outlets (15A), facing said agitator members, for the admission of said flow of gas and fibers.
3. Device according to Claim 1 or 2, characterized in that said chamber is associated with suction members for sucking in and recycling lumps of fibers which do not pass through said screen mesh.
4. Device according to Claim 3, characterized in that said suction members comprise at least one set of suction inlets (53) adjacent to each other along a direction of alignment which is transverse with respect to the direction of advance of said forming wire.
5. Device according to Claim 4, characterized in that said at least one set of suction inlets is aligned parallel to the axes of rotation of said agitator members.

- 14 -

6. Device according to Claim 4 or 5, characterized in that it comprises two sets of suction inlets (53) located at two opposite ends of the chamber along the direction of advance of the screen mesh.

7. Device according to one or more of the preceding claims,
5 characterized in that said agitator members comprise independent motors (46).

8. Device according to Claim 7, characterized in that said independent motors are bidirectional.

9. Device according to one or more of the preceding claims,
10 characterized in that said shaped profiles (51) carried by said shafts have a configuration with at least one point.

10. Device according to one or more of the preceding claims,
characterized in that each of said agitator members comprises a shaft (47) on which is keyed a plurality of disks (49) each of which carries at least one of
15 said shaped profiles (51).

11. Device according to Claim 10, characterized in that each of said profiles has at least one configuration essentially in the form of an isosceles triangle, lying on a cylindrical surface, their sides which converge on the vertex being curved and having their concavity facing the outside of the
20 triangle to form a point.

12. Device according to Claim 10 or 11, characterized in that each of said disks is associated with at least two of said shaped profiles (51), each of which has at least one point.

13. Device according to one or more of the preceding claims,
25 characterized in that a compartment (13) for the introduction of an auxiliary flow of gas is provided above the chamber, holes (11A) being made in a separating partition (11) which separates said compartment (13) from said chamber (9), to allow said auxiliary flow of gas to pass from the compartment (13) to the chamber (9).

30 14. Device according to Claims 2 and 13, characterized in that said diffusers (15) extend from said separating partition (13) towards the interior of the chamber (9).

- 15 -

15. Device according to Claim 2 at least, characterized in that said diffusers (15) are arranged in alignments essentially parallel to the axes of said agitator members (45).

5 16. Device according to Claim 2 at least, characterized in that said diffusers (15) terminate in outlets (15A) elongated in a transverse direction with respect to the direction of advance of said forming wire, and in that the apertures of said outlets and their distance from the screen mesh are such that the jets of gas and suspended fibers from adjacent outlets intersect above the screen mesh.

10 17. Device according to one or more of the preceding claims, characterized in that the distance of said screen mesh (17) from the agitator members (45) is adjustable.

15 18. Device according to one or more of the preceding claims, characterized in that a portion of said screen mesh (17), forming the bottom closure of said chamber (9), is guided by guide members (93, 95, 97, 99) whose distance from the agitator members (45) is adjustable.

20 19. Device according to Claim 18, characterized in that said guide members comprise an upper frame (93) and a lower frame (95), essentially parallel to each other and spaced apart from each other, through which said screen mesh (17) passes.

20. Device according to Claim 19, characterized in that said upper and lower frames (93, 95) are supported in a position which is adjustable with respect to the position of the agitator members (45).

25 21. Device according to Claim 20, characterized in that said upper and lower frames (93, 95) are supported by a sliding block (81) which can be adjusted and clamped on the supporting structure (7) of said head (1).

30 22. Device according to Claim 21, characterized in that said sliding block (81) supports at least two return rollers (21, 23) of said screen mesh (17), between which extends said portion of the screen mesh which closes the bottom of said chamber.

23. Device according to one or more of Claims 19 to 22, characterized in that said upper frame (93) is integral with a guide section (97)

- 16 -

for said screen mesh (17).

24. Device according to one or more of Claims 19 to 23, characterized in that said lower frame (95) is integral with a guide section (99) for said screen mesh (17).

5 25. Device according to one or more of Claims 18 to 24, characterized in that extendable sealing means (9E, 97B) are positioned between said guide members (93, 95, 97, 99) and the chamber (9) of said forming head (1).

26. Device according to Claims 19 and 25 at least, characterized in
10 that said extendable sealing means comprise a section (97, 97B) integral with said upper frame (93) and interacting with a perimetric edge (9E) surrounding the bottom opening (9A) of said chamber.

27. Device according to one or more of Claims 18 to 26,
characterized in that adjustable sealing means (101) are provided between
15 said guide members and said forming wire (3).

28. Device according to Claims 19 and 27, characterized in that said adjustable sealing means comprise a box (101) open above and below, towards said screen mesh (17) and towards said forming wire (3), supported by said lower frame (95).

20 29. Device according to one or more of the preceding claims, characterized in that it comprises internal cleaning means (61) for cleaning the surface of the screen mesh facing said chamber (9).

30. Device according to Claim 29, characterized in that said internal cleaning means (61) are suction means.

25 31. Device according to one or more of the preceding claims, characterized in that it comprises external cleaning means (65) for cleaning the surface of the screen mesh facing the forming wire (3).

32. Device according to Claim 31, characterized in that said external cleaning means (65) are suction means.

30 33. Device according to one or more of the preceding claims, characterized in that said screen mesh runs around a plurality of return rollers (19, 21, 23, 25, 27, 29), located around said chamber (9) and outside it, at

- 17 -

least one (25) of these rollers being powered.

34. Device according to Claim 33, characterized in that at least one of the return rollers (23) located directly downstream from the bottom opening (9A) of the chamber (9) with respect to the direction of advance (f17) of said screen mesh (17) is associated with doctor blade means (71) for removing
5 any detritus adhering to said roller.

35. Device according to Claim 33 at least, characterized in that at least one (19) of said return rollers is supported in a movable way for tensioning said screen mesh.

10 36. Device according to Claim 33 at least, characterized in that at least one (27) of said return rollers is associated with means of aligning the screen mesh.

37. Device according to Claim 13 at least, characterized in that the assembly formed by said chamber (9) and said compartment (13) is delimited
15 outwardly by a box which is open only next to said screen mesh (17).

38. Device according to Claim 10 at least, characterized in that each of said shaped profiles is symmetrical and has two points orientated in two opposed directions in the tangential direction of said disks.

Fig. 1





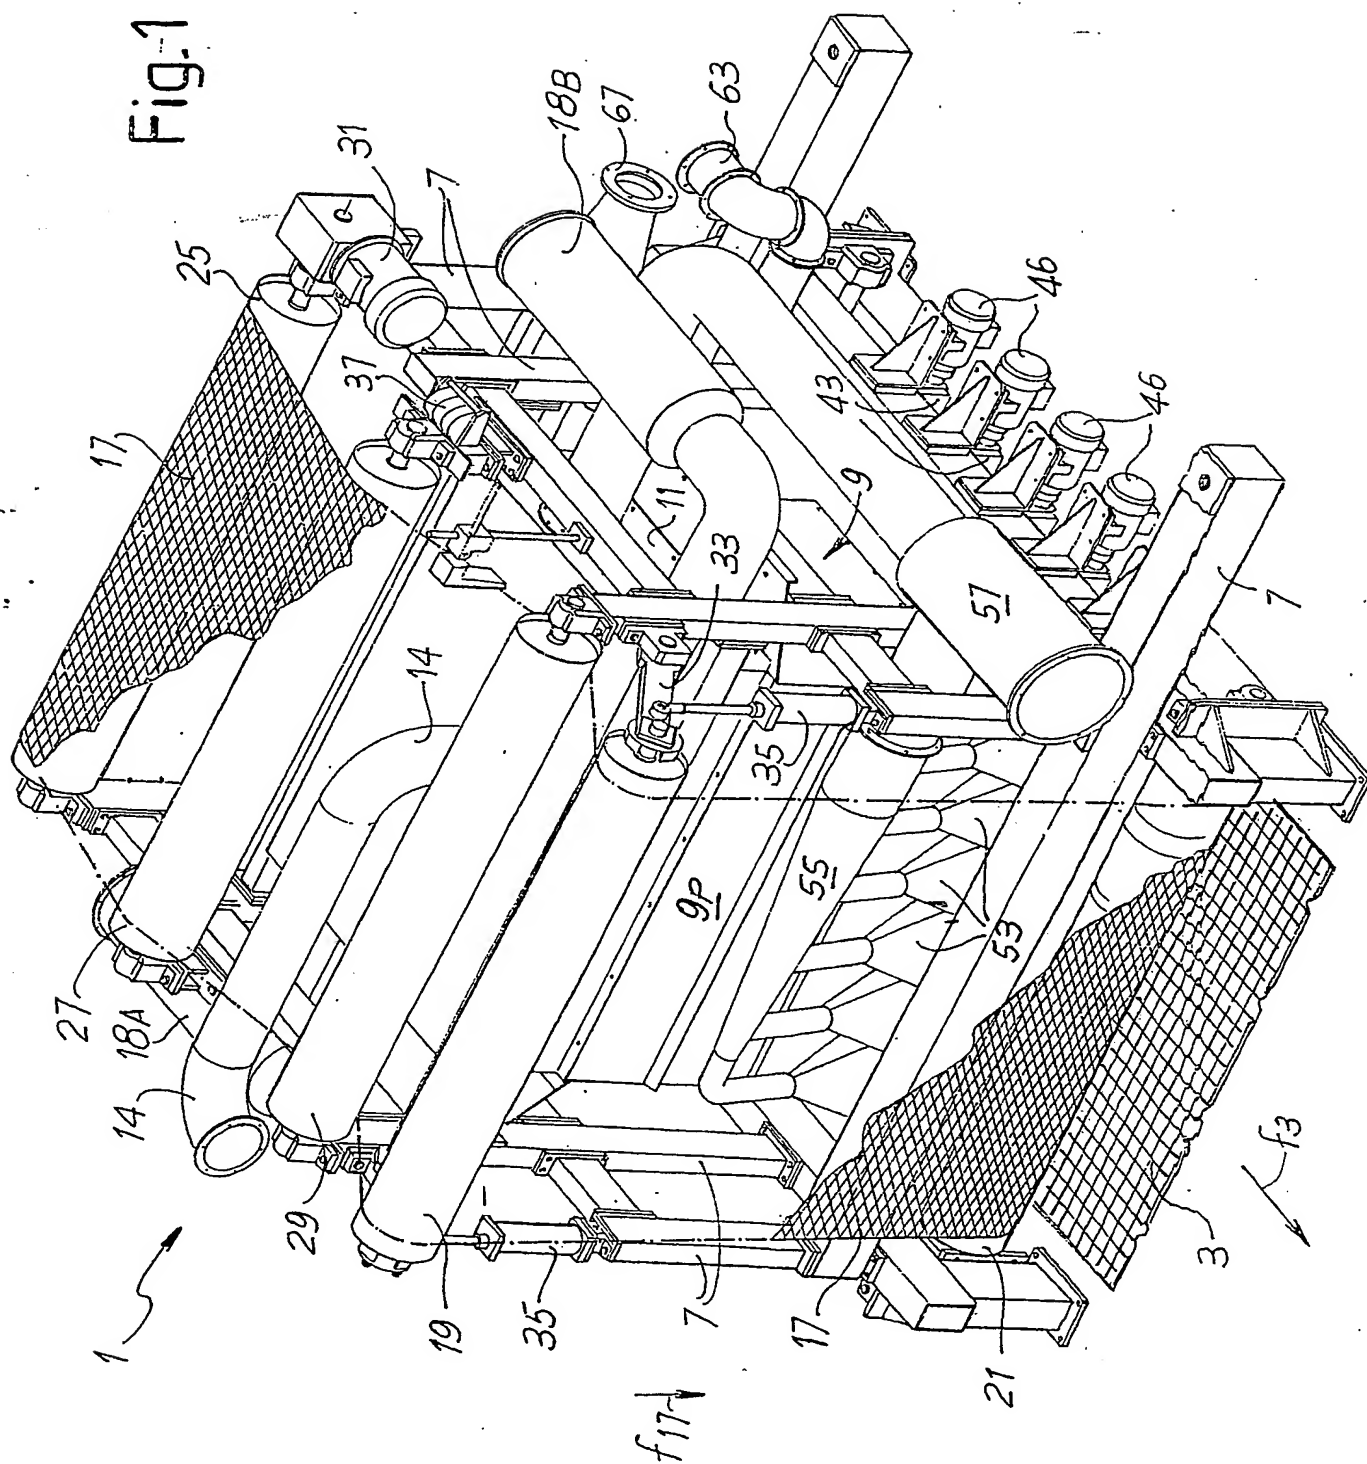



Fig. 2

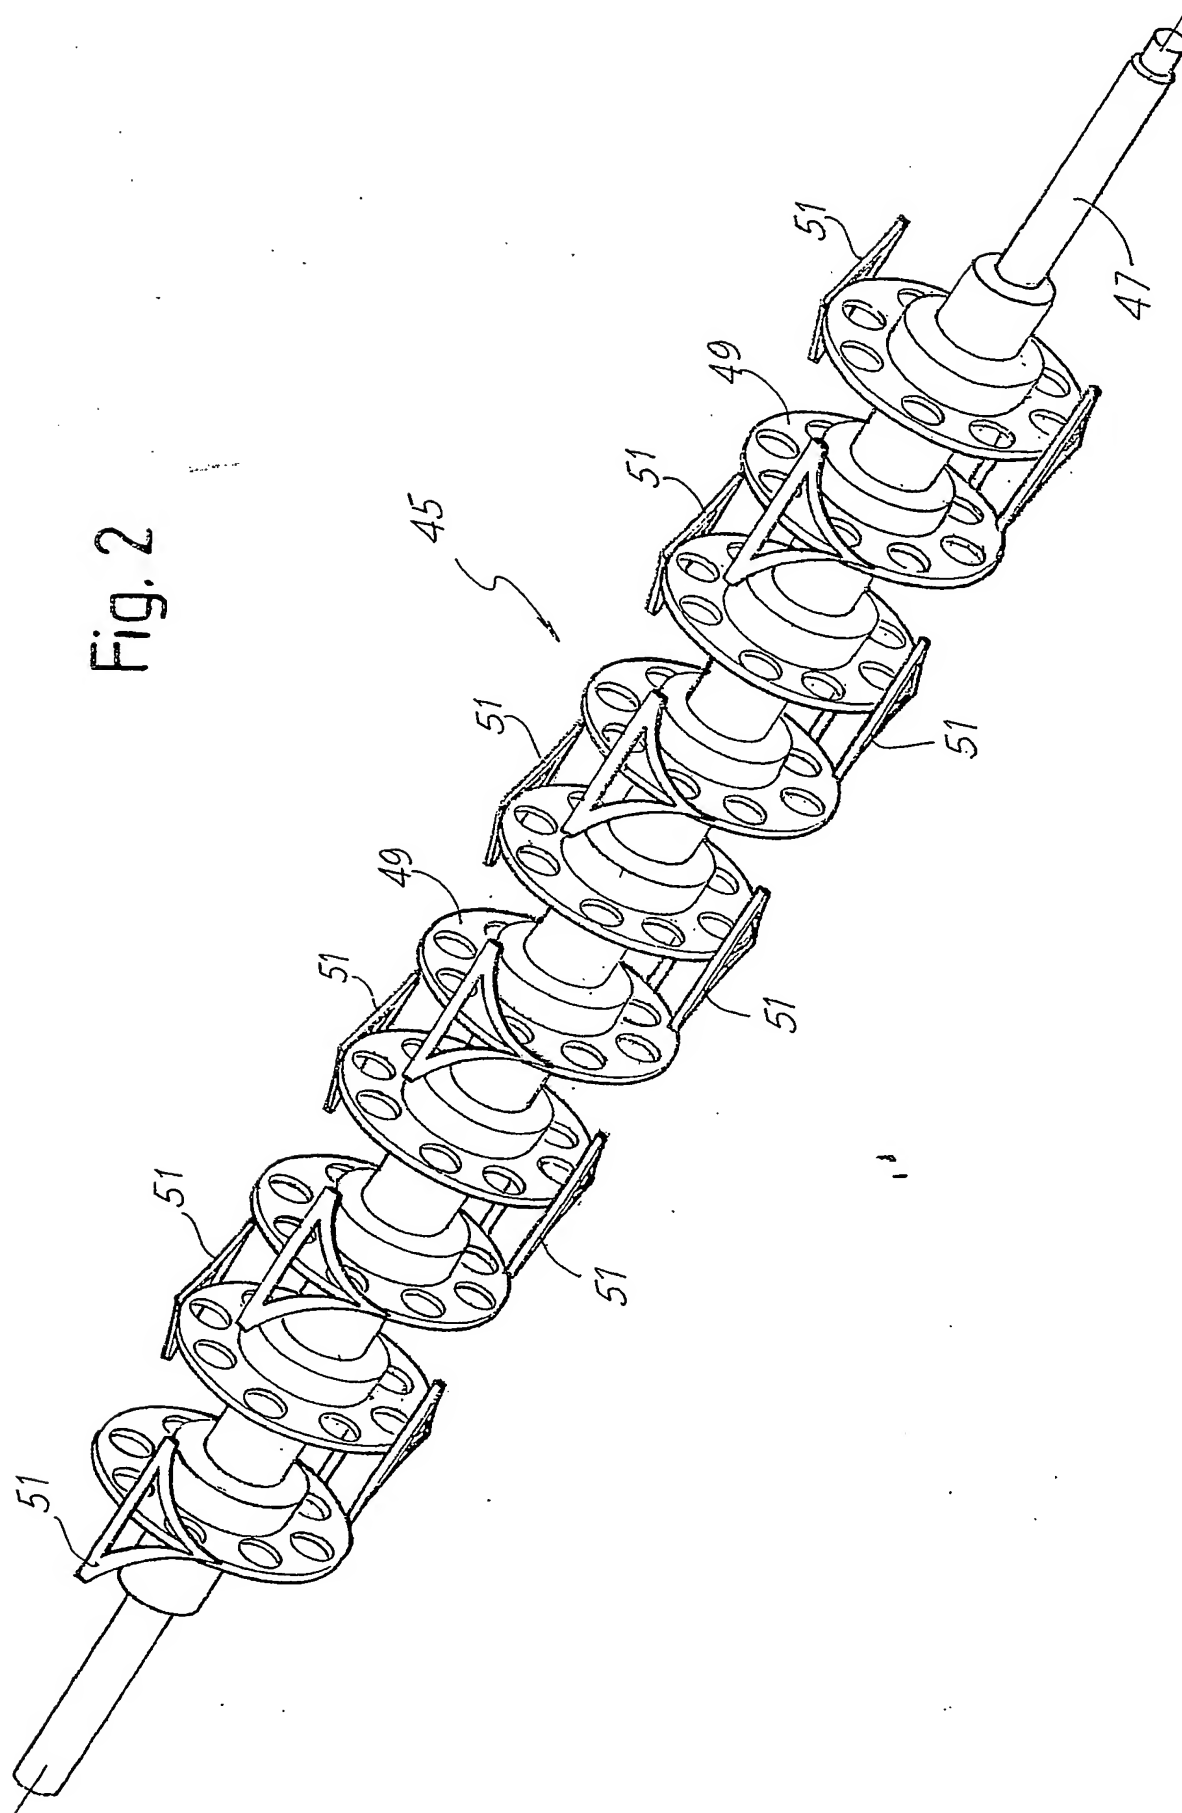

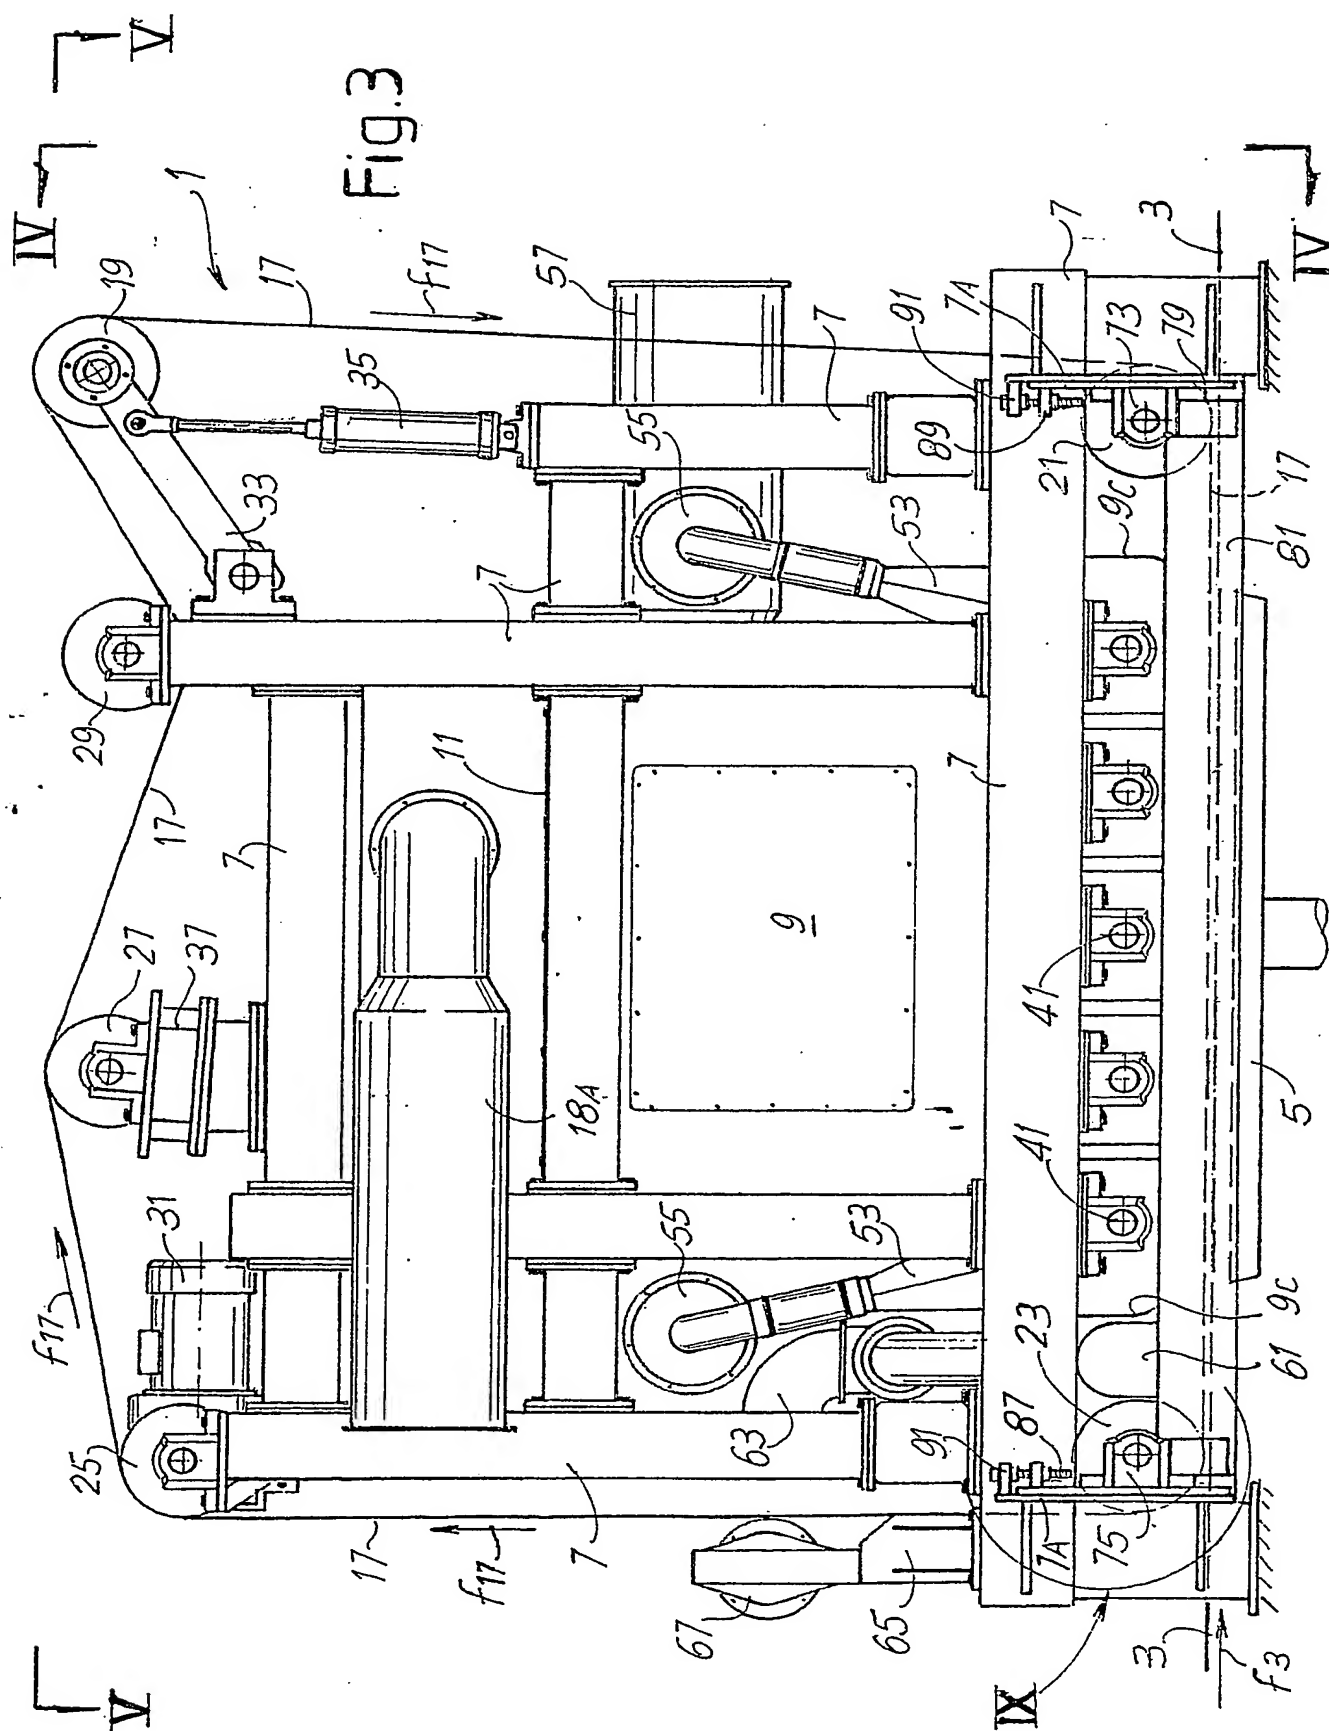


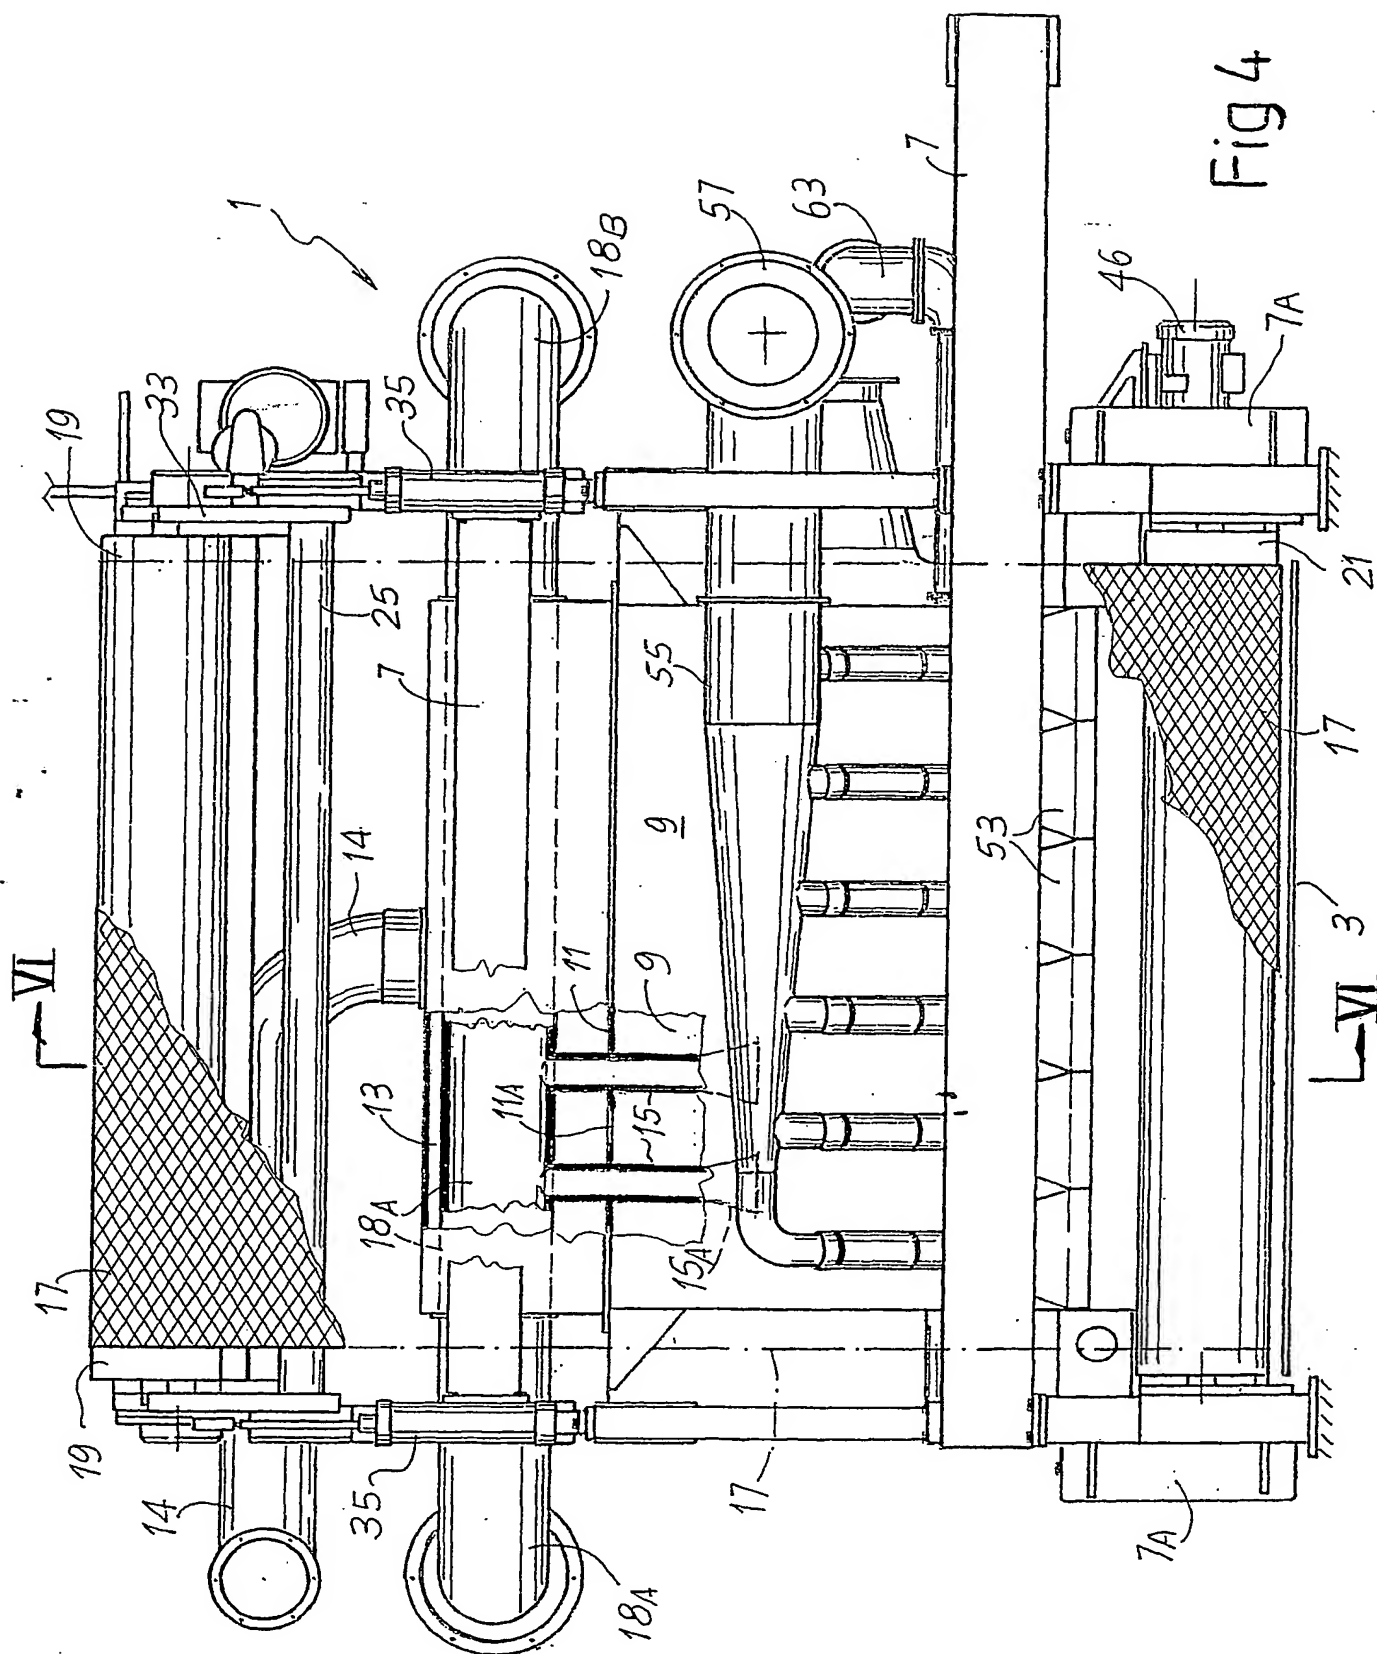


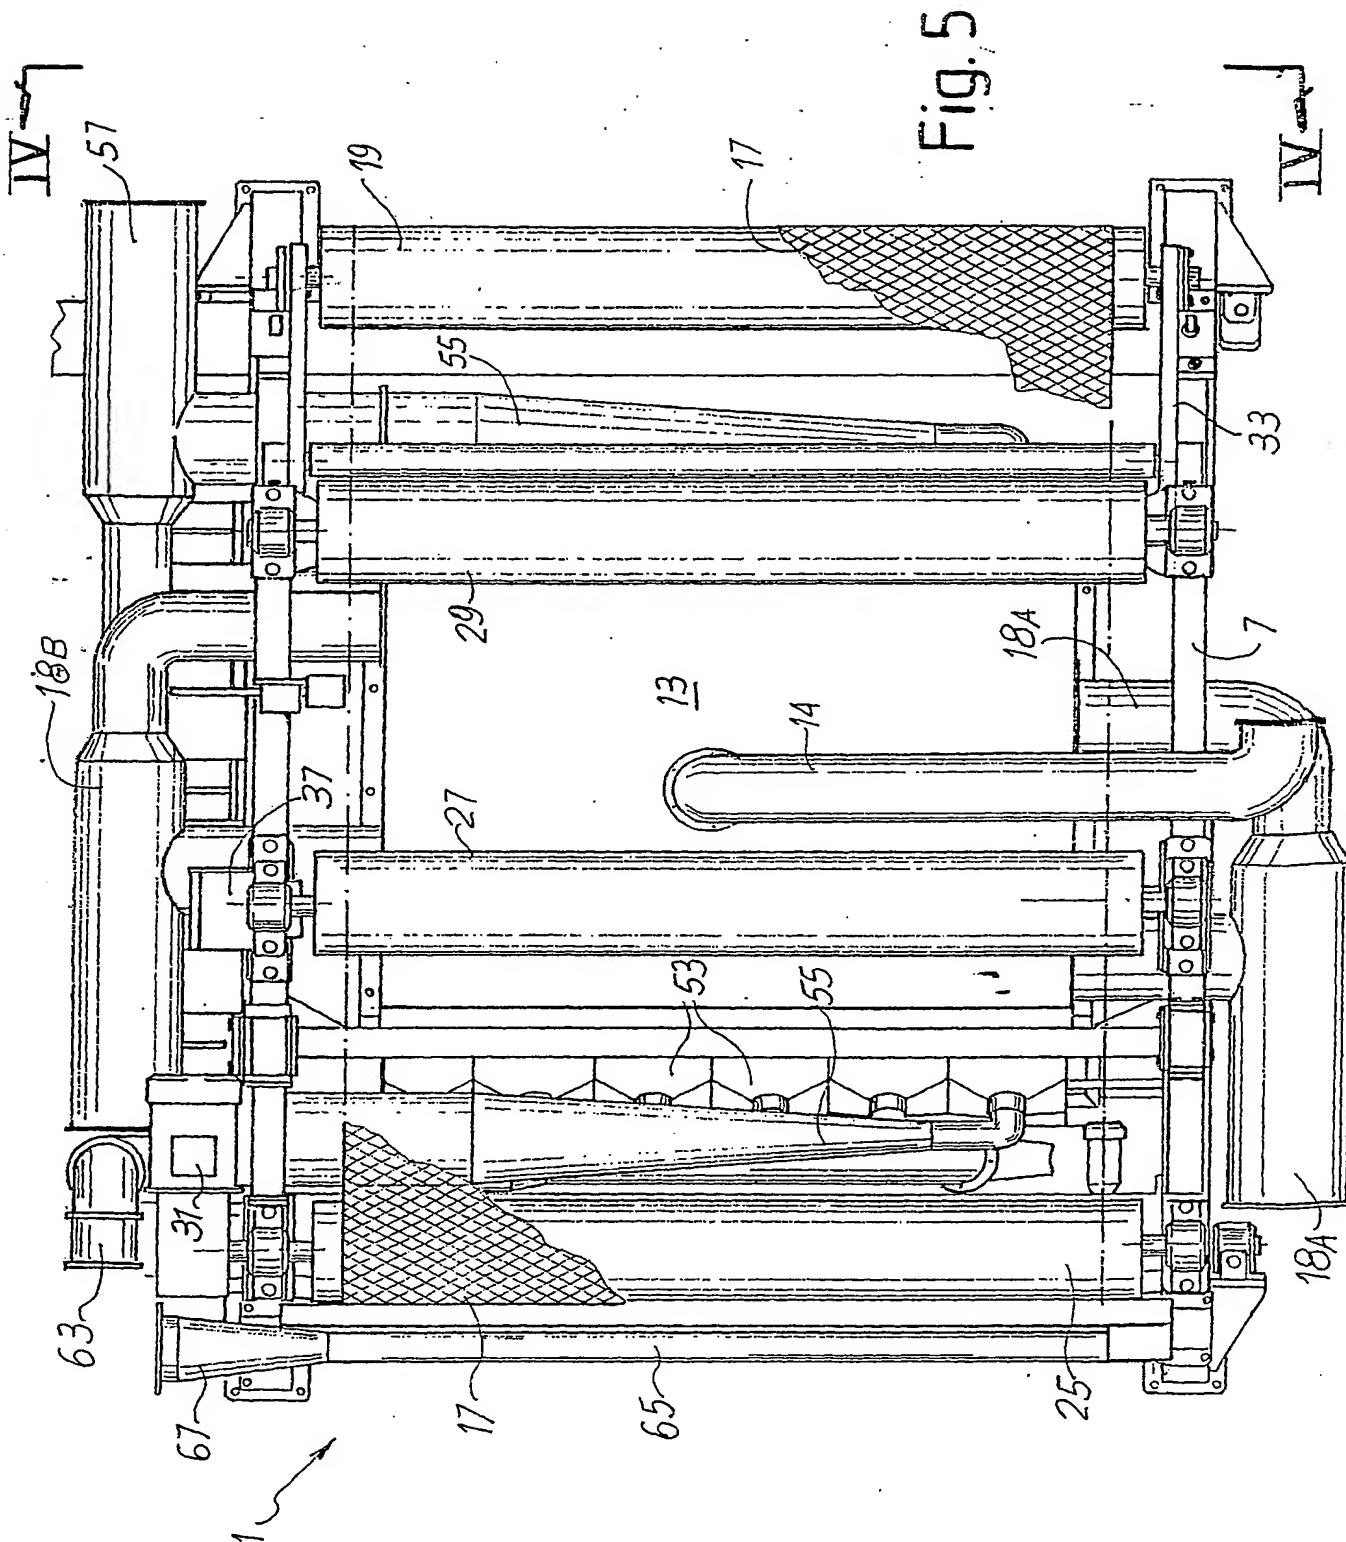

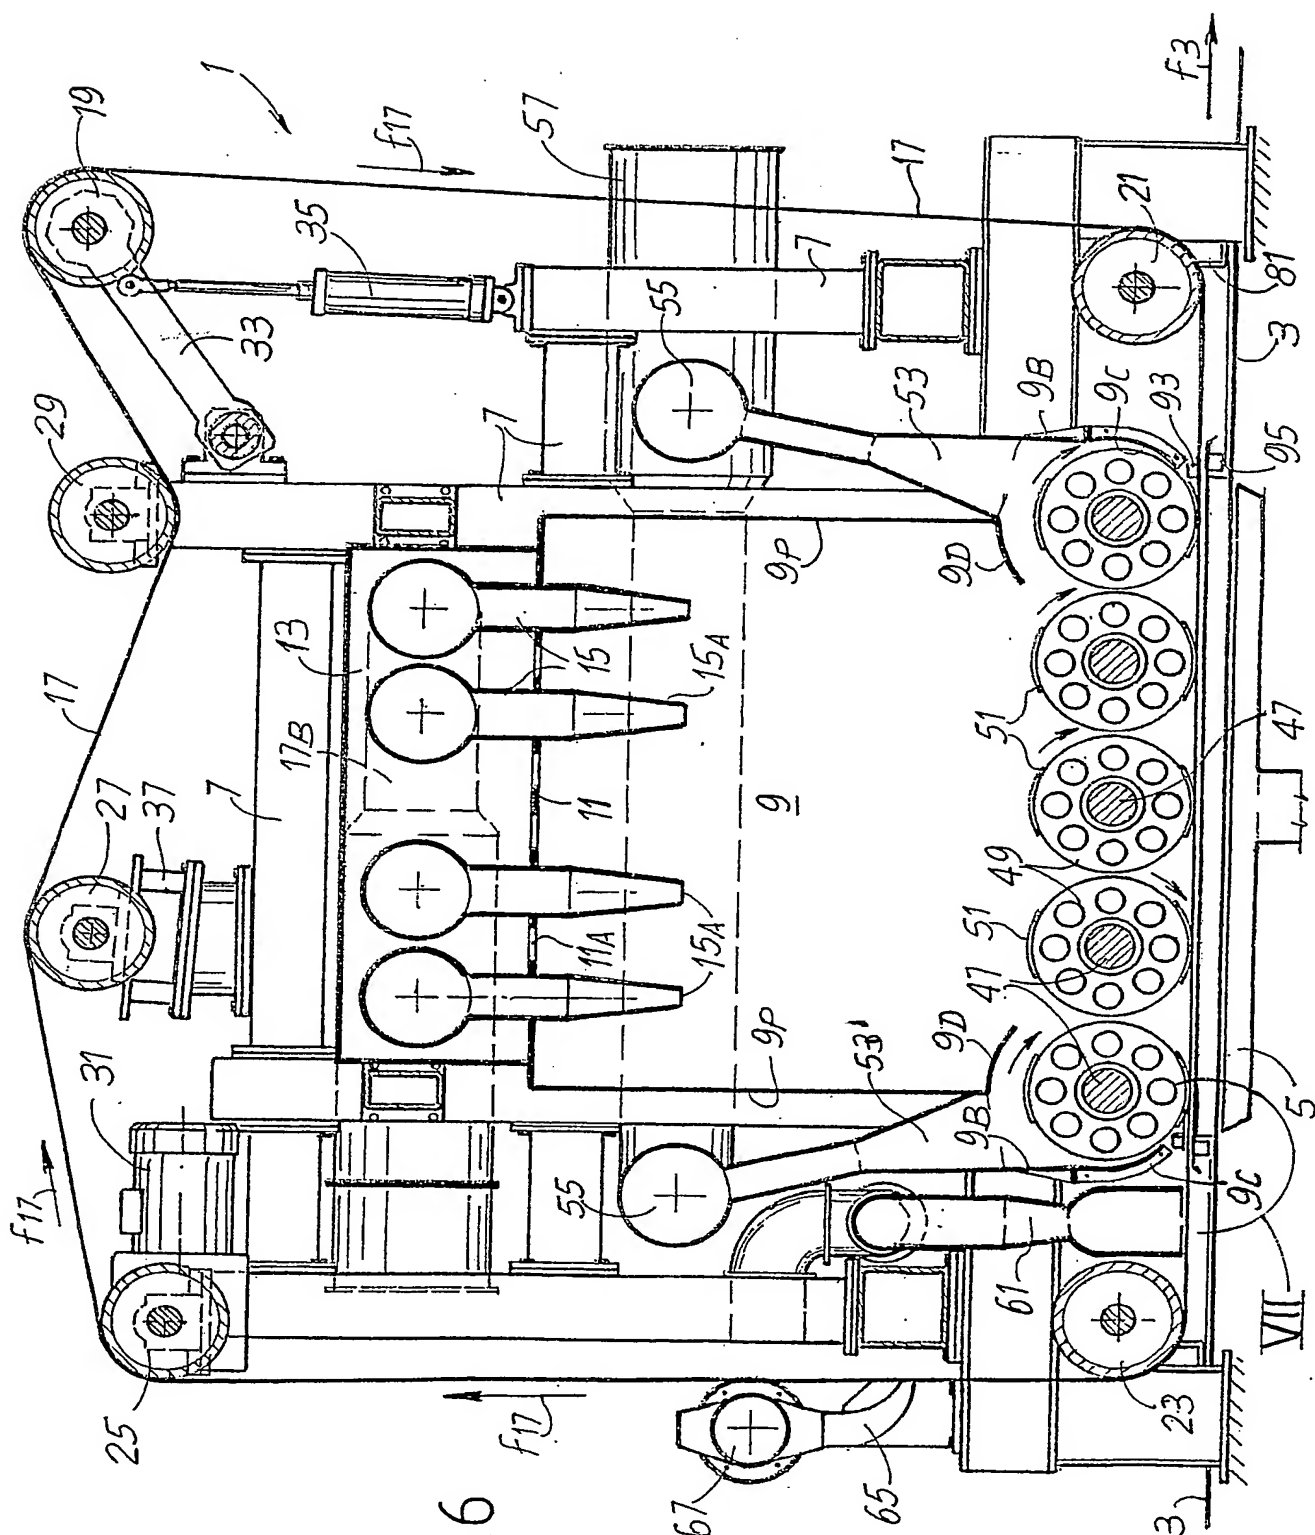

6. 5. 11

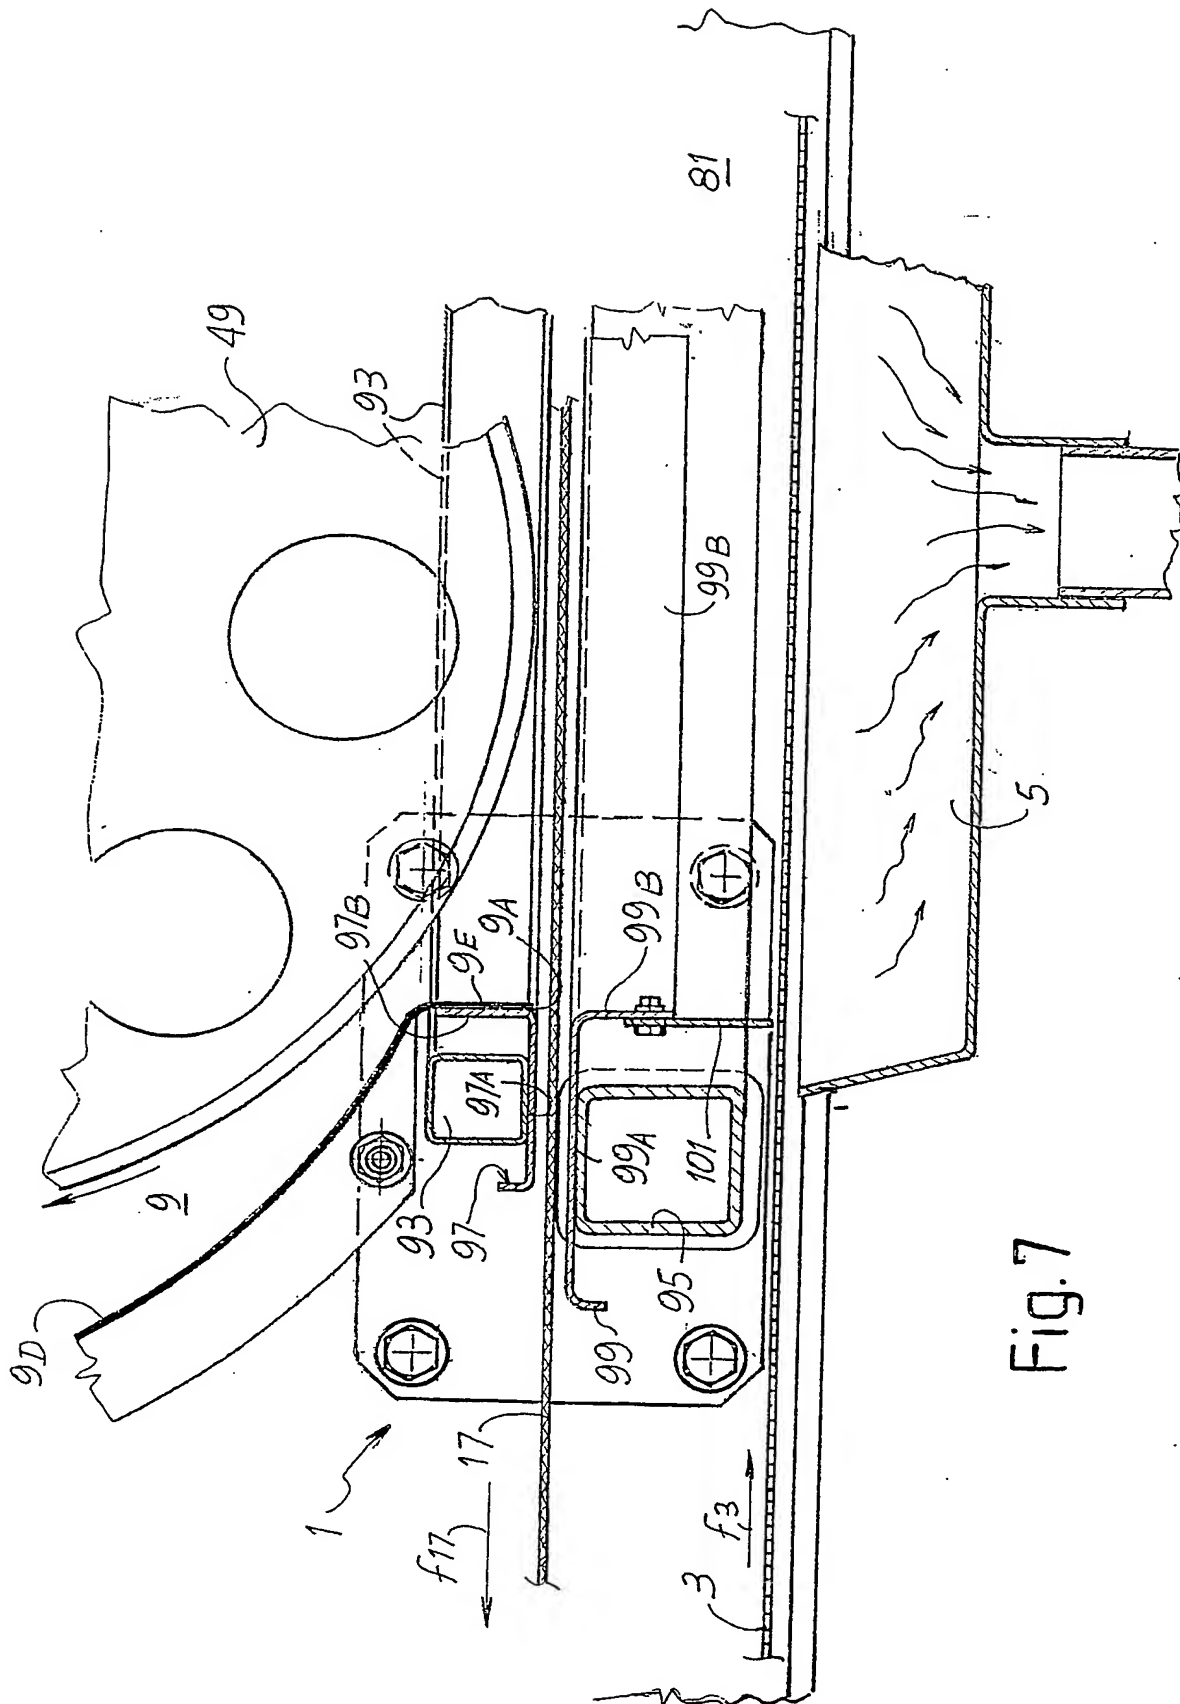

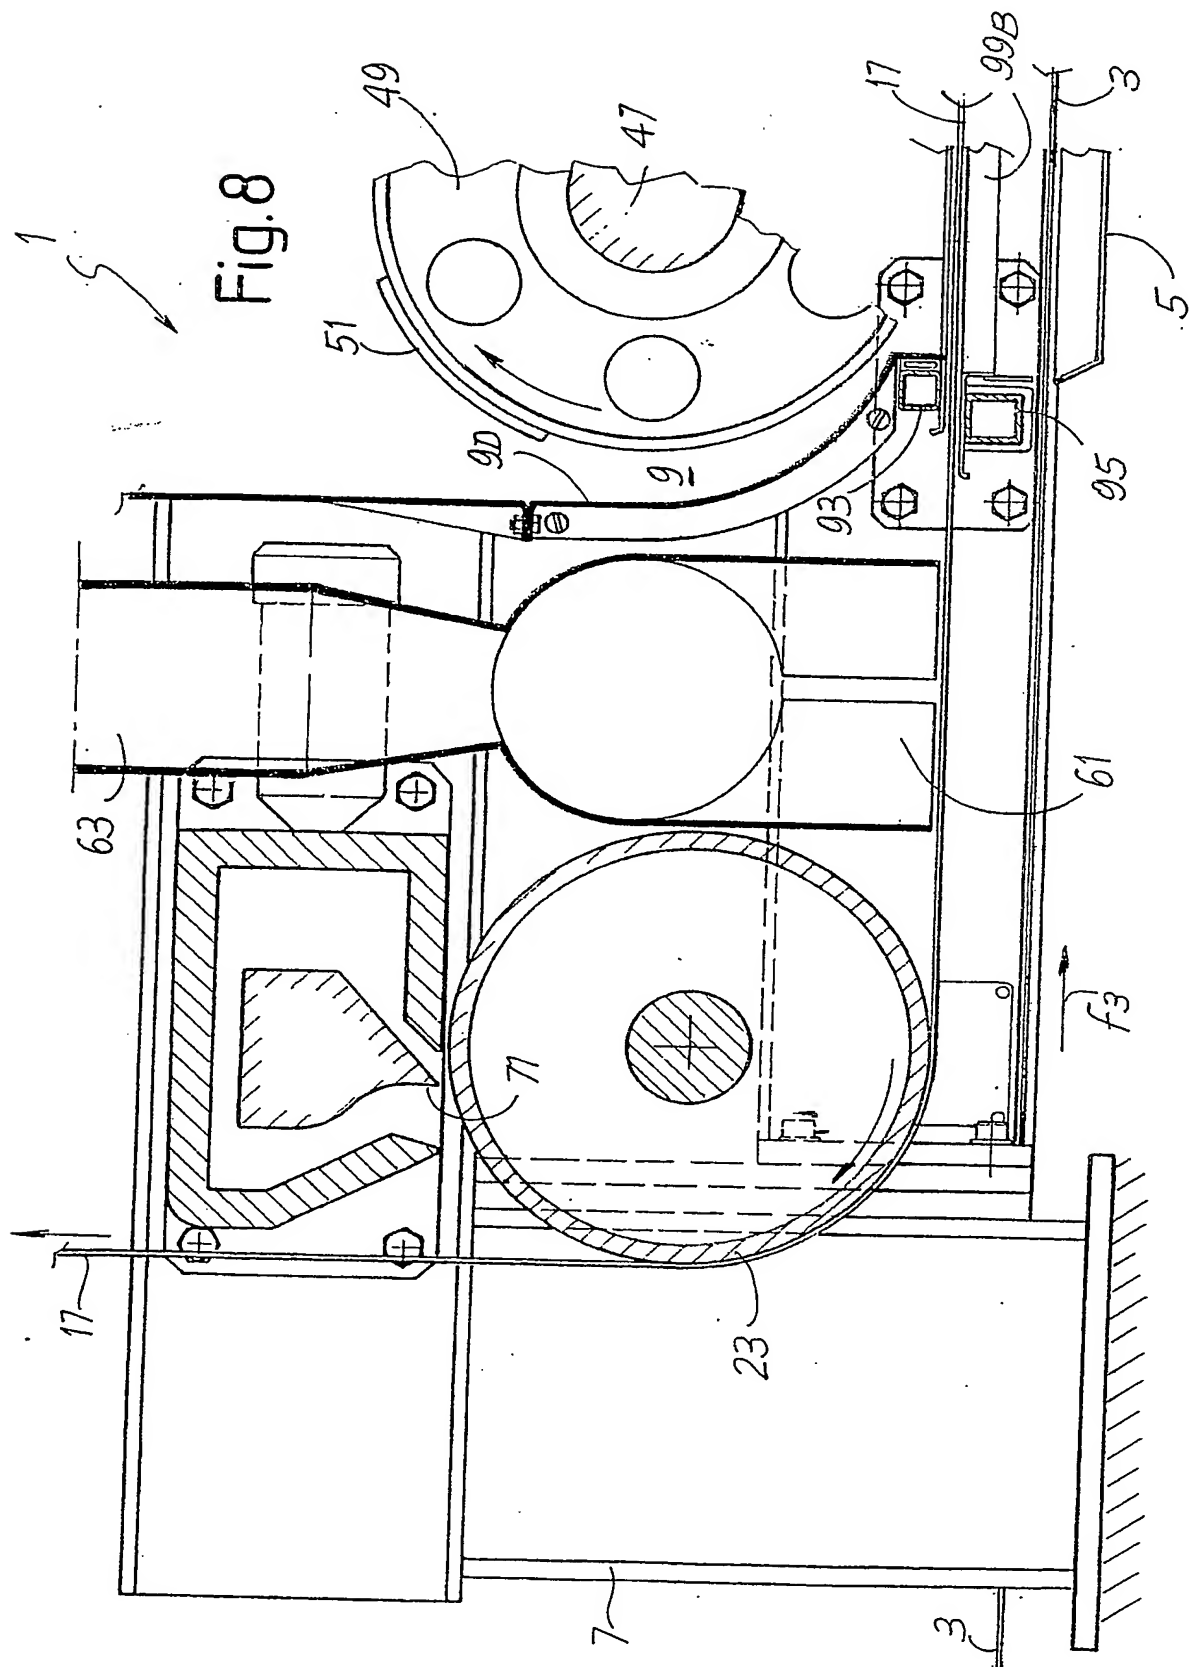

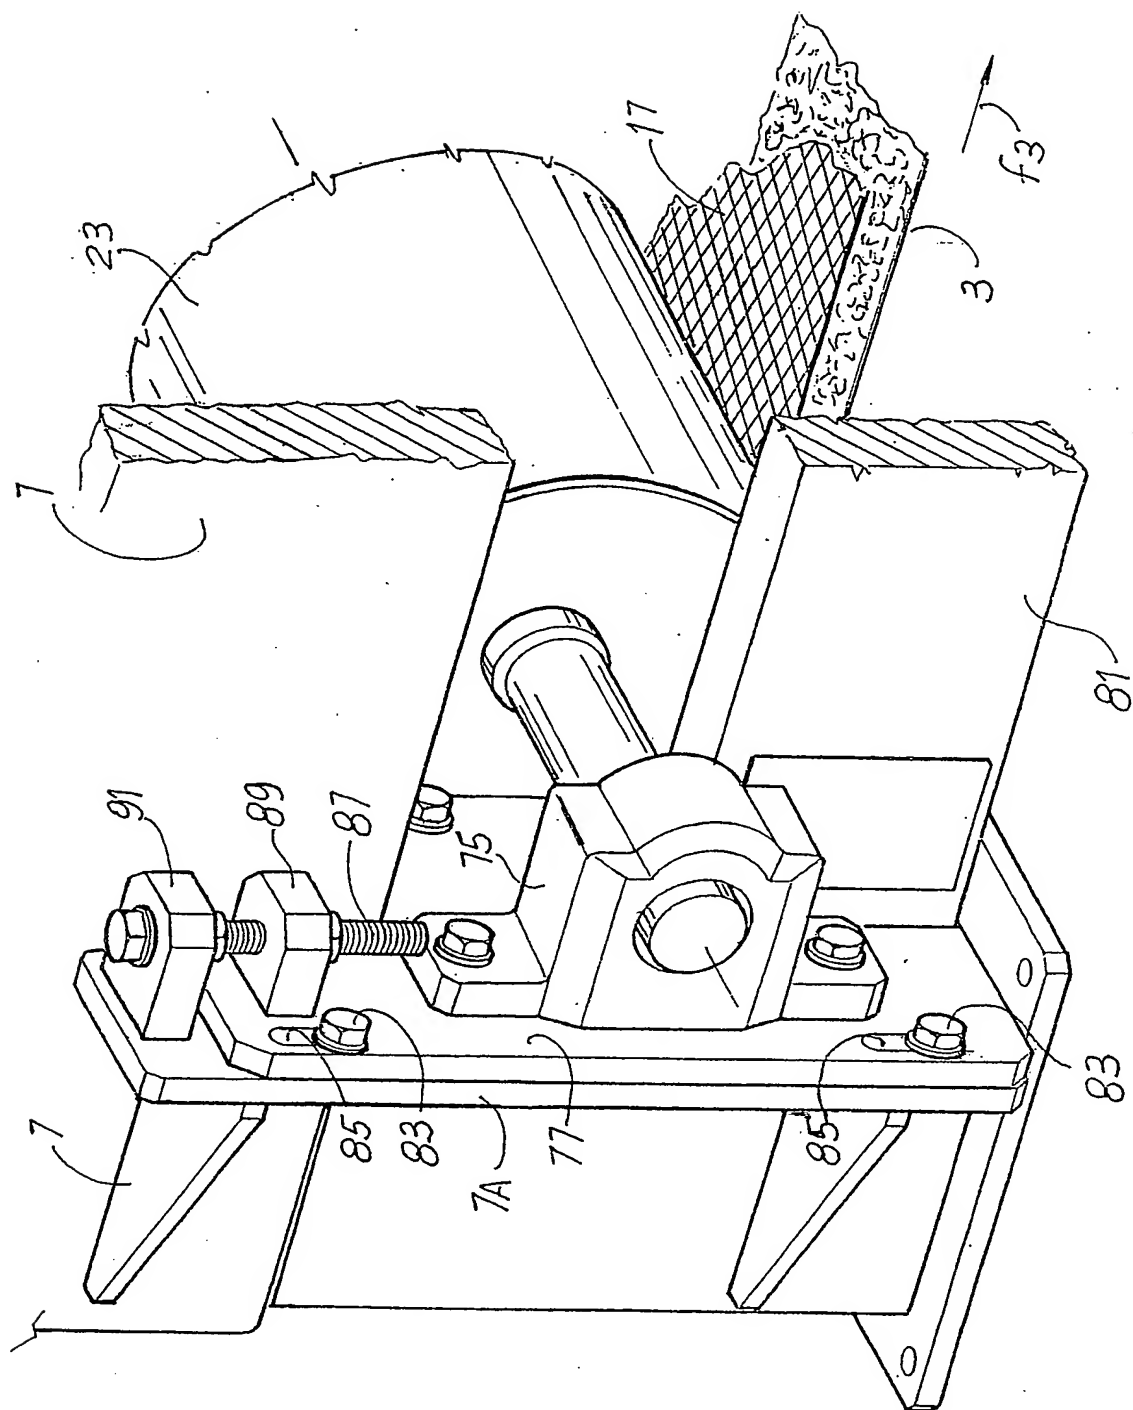


Fig.9

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 02/00657

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 D21F9/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 D21H D21F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X . A . A	<p>US 4 169 699 A (WERNER EDWARD E) 2 October 1979 (1979-10-02)</p> <p>column 2, line 28 -column 4, line 53 figures</p> <p>---</p> <p>US 6 233 787 B1 (ANDERSEN CARSTEN ET AL) 22 May 2001 (2001-05-22) cited in the application column 10, line 39 -column 11, line 6 column 7, line 9 - line 51 figure 16</p> <p>---</p> <p>-/--</p>	<p>1, 3-5, 18, 29, 30, 33, 35, 36 19-22</p> <p>1, 7</p>

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

6 June 2003

Date of mailing of the international search report

17/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Pregetter, M

INTERNATIONAL SEARCH REPORT

Internati .pplication No

PCT/IT 02/00657

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 268 235 A (BEAN WILLIAM C ET AL) 19 May 1981 (1981-05-19) column 2, line 25 -column 3, line 43 figures ---	1,2
A	US 4 157 724 A (PERSSON TORSTEN B) 12 June 1979 (1979-06-12) column 5, line 16 -column 6, line 2 figures 6,7 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 02/00657

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4169699	A	02-10-1979	US 4258455 A	31-03-1981
US 6233787	B1	22-05-2001	DK 152097 A	15-06-1998
			AU 1752099 A	02-08-1999
			AU 757141 B2	06-02-2003
			AU 1869299 A	02-08-1999
			BG 104519 A	30-04-2001
			BR 9814320 A	10-10-2000
			CA 2310061 A1	22-07-1999
			CN 1103839 B	26-03-2003
			WO 9936622 A1	22-07-1999
			WO 9936623 A1	22-07-1999
			EA 2042 B1	24-12-2001
			EP 1044303 A1	18-10-2000
			HU 0100536 A2	28-06-2001
			JP 2002509207 T	26-03-2002
			NO 20002728 A	26-05-2000
			PL 341602 A1	23-04-2001
			SK 7552000 A3	12-02-2001
			TR 200001804 T2	23-07-2001
US 4268235	A	19-05-1981	US 4332756 A	01-06-1982
US 4157724	A	12-06-1979	US RE31775 E	25-12-1984

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.